


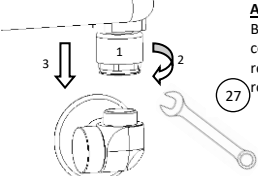
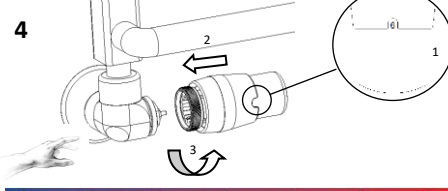





Kit Catalog Number:

LUX1GS02...CFK/L; LUX1GS02...CFK/L (PEX/CU)-left\*

LUX1GS02...CFK/P; LUX1GS02...CFK/P (PEX/CU)-right

Thermostatic valve (M762-...)*	Shut-off valve (M765-...)*															
<p><b>1</b></p> 																
<p><b>2.a (Rp 1/2")</b></p> 	<p><b>Attention:</b> Before installing the valve, it is possible to install the rosette and extensions or <u>masking sleeves (2.b / 2.c)</u> in the corner of the connection (<i>additional equipment</i>). Full tightness is achieved by e.g. winding a special thread for sealing threads on the external thread. We can achieve this thanks to other thread sealing agents available on the market (pastes, adhesives, Teflon, tow). <u>The shut-off valve is mounted in the same way.</u></p>															
<p><b>3</b></p>  <p><b>Attention:</b> Before tightening the coupler, it is recommended to lift the rosette 1.</p>	<p><b>3</b></p>  <p><b>Attention:</b> Before unscrewing the connector, it is recommended to lift the rosette 1.</p>															
<p><b>4</b></p>  <table border="1" data-bbox="106 981 554 1029"> <tr> <td>•</td> <td>1</td> <td>2</td> <td>3</td> <td>4</td> <td>5</td> <td>6</td> </tr> <tr> <td></td> <td>8°C</td> <td>12°</td> <td>16°</td> <td>20°</td> <td>24°C</td> <td>28°</td> <td>30°C</td> </tr> </table>	•	1	2	3	4	5	6		8°C	12°	16°	20°	24°C	28°	30°C	<p><b>4</b></p>  <p><b>Attention:</b> Flow control in accordance with the Product Catalog Card (<a href="http://www.varioterm.pl/en/technical-support">www.varioterm.pl/en/technical-support</a>).</p>
•	1	2	3	4	5	6										
	8°C	12°	16°	20°	24°C	28°	30°C									
<p><b>2.b (Pex 16x2)</b></p>  <p><b>Attention:</b> Take care not to damage the o-rings responsible for the tightness of the coupling between the installation and the valve when installing the 16x2 coupler.</p>	<p><b>2.c (Cu 15x1)</b></p>  <p><b>Attention:</b> Remove sharp material residues from the outside of the tubing that could damage the o-rings inside the fitting when forcing it onto the tubing. After crimping the coupler, first check that it is not possible to turn and / or slide the pipe out by pulling it <b>STRONGLY</b>, and then check the hydraulic tightness.</p>															

**Terms of warranty:**

- The manufacturer provides a warranty for a period of **3 years** from the date of purchase.
- Defects revealed during the warranty period will be removed free of charge within 14 business days from the date of their notification.
- Notification of a defect or damage is accepted by e-mail: [reklamacje@varioterm.pl](mailto:reklamacje@varioterm.pl) or by phone (022) 8724214.
- In order to perform a warranty repair, the defective product must be delivered to the VARIO TERM office with a description of the reason complaints and a copy of the proof of purchase with the stamp of the facility where the purchase was made and clearly marked with the date of purchase.
- The warranty does not cover parts that are subject to natural wear and tear during their lifetime, and defects caused as a result installation and use inconsistent with the instructions, defects bearing signs of mechanical or thermal damage or signs of user interference.
- The Purchaser loses all rights resulting from the guarantee in the event of: 1) loss or destruction of the proof of purchase, 2) unauthorized repairs, disassembly, 3) improper or inconsistent with the instructions for use.